

Europäisches Patentamt
European Patent Office
Office européen des brevets



Publication number: 0 411 118 A1

(12)

EUROPEAN PATENT APPLICATION
published in accordance with Art.
158(3) EPC

(21) Application number: 88902924.5

(51) Int. Cl.⁵: A61M 25/00, A61M 29/00

(22) Date of filing: 25.03.88

(86) International application number:
PCT/JP88/00306

(87) International publication number:
WO 88/07390 (06.10.88 88/22)

(30) Priority: 25.03.87 JP 70781/87

(43) Date of publication of application:
06.02.91 Bulletin 91/06

(84) Designated Contracting States:
BE DE FR GB IT NL SE

(71) Applicant: TERUMO KABUSHIKI KAISHA
No. 44-1, Hatagaya 2-chome, Shibuya-ku
Tokyo 151(JP)

(72) Inventor: HARADA, Fumiaki
Terumo Kabushiki Kaisha 2656-1, Ohbuchi

Fuji-shi Shizuoka-ken 417(JP)
Inventor: SAGAE, Kyuta
Terumo Kabushiki Kaisha 2656-1, Ohbuchi
Fuji-shi Shizuoka-ken 417(JP)
Inventor: NOBUYOSHI, Masakiyo
3-2-17, Yamate Kokuraminami-ku
Kitakyushu-shi Fukuoka-ken 803(JP)

(74) Representative: Casalonga, Alain et al
BUREAU D.A. CASALONGA - JOSSE
Morassistrasse 8
D-8000 München 5(DE)

(54) INSTRUMENT FOR SECURING INNER DIAMETER OF INNER CAVITY OF TUBULAR ORGAN AND
CATHETER EQUIPPED WITH THE INSTRUMENT.

(57) This invention discloses an instrument for securing an inner diameter which expands the inner cavity of a tubular organ such as the blood vessel and keeps the expanded state at least for a predetermined period, and a catheter which is used for keeping this instrument at a predetermined portion of the tubular organ and can move and withdraw the instrument from the kept position. The instrument for securing the inner diameter consists of a bidirectional shape memory alloy and can expand and contract in a radial direction with a temperature change. At least one side hole is formed in the peripheral surface near the tip of the catheter, and the catheter supports removably the instrument for securing the inner diameter at this side hole portion.

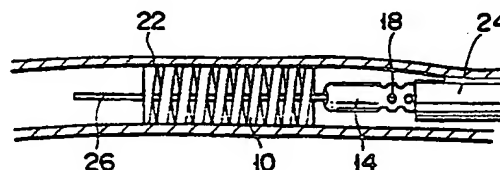


FIG. 9

INSTRUMENT FOR MAINTAINING INNER DIAMETER OF TUBULAR ORGANS AND CATHETER PROVIDED WITH SAID INSTRUMENT

[Technical Field]

The present invention relates to an expansion retainer for ensuring a desired inner diameter of a tubular organ and to a catheter for introducing or recovering the expansion retainer. [Prior Art]

Where a narrowed portion of, for example, the coronary arteries is expanded with an angioplasty catheter, it is necessary to take measures for preventing the expanded portion from being narrowed again. In such a case, an expansion retainer, hereinafter referred to as "stent", is generally used for ensuring a desired inner diameter of a tubular organ.

A stent prepared by weaving a stainless steel wire in the form of a net is proposed in "Surgery, 1986, vol. 99, No. 2, pp-199-205". Another stent formed of a one-way shape memory alloy is proposed in Published Examined Japanese Patent Application No. 61-6655. For ensuring expansion of, for example, a blood vessel by using a stent formed of stainless steel, the stent is introduced into a predetermined position of the blood vessel through an angioplasty catheter. Then, a balloon disposed at the distal end portion of the catheter is expanded so as to expand the stent to have a diameter conforming with the inner diameter of the blood vessel. In the case of using a stent formed of a one-way shape memory alloy, the stent introduced into a predetermined position of a blood vessel is heated by, for example, warm water so as to expand the stent.

The stent once expanded cannot be deformed unless an external force is applied thereto. Thus, it is impossible to take out the stent left in the blood vessel even after recovery of the body part to which the surgical operation was applied. Naturally, it is of high importance for the stent to be compatible with a living body. What should also be noted with respect to the prior art is that, even if the stent is found to have been left in an erroneous position, it is very difficult to change the position of the stent once expanded.

The present invention, which has been achieved in view of the situation described above, is intended to provide a stent for a tubular organ, which can be freely brought back to the small original shape even after expanded within a tubular organ, thus making it possible to recover the stent once introduced into the tubular organ, and to change freely the position of the stent once expanded within the tubular organ, and to provide a catheter for operating the stent.

Disclosure of the Invention

To solve the above-noted problems inherent in the prior art, a stent of the present invention is formed of a two-way shape memory alloy. Also, the stent is mounted at the distal end of a catheter having a side hole. Cooling water supplied through the side hole is brought into contact with the stent, as desired, so as to control the shrinkage and expansion of the stent, as desired.

According to one embodiment of the present invention, there is provided a stent for a tubular organ, characterized in that the stent consists of a substantially cylindrical shaped body formed of a two-way shape memory alloy capable of expansion or shrinkage in the radial direction in accordance with changes in temperature.

It is desirable for the cylindrical body of the two-way shape memory alloy to be in the expanded state about the body temperature and in the shrunk state at a temperature substantially lower the body temperature.

According to another embodiment of the present invention, there is provided a catheter equipped with a stent for a tubular organ, characterized by comprising a catheter tube open at the proximal end or both proximal and distal ends, at least one side hole, which communicates with said opening, being formed at the circumferential surface near the distal end of said catheter tube; a hub portion mounted to communicate with the distal end of the catheter tube; and a stent for ensuring a desired inner diameter of a tubular organ, said stent consisting of a cylindrical body formed of a two-way shape memory alloy, being capable of expansion or shrinkage in the radial direction in accordance with changes in temperature, and being mounted to cover at least a part of the distal end portion of the catheter tube including the side hole.

It is desirable for the hub portion to be formed of a branched hub having two ports, with a hemostatic valve being mounted to one of said ports.

The shape memory alloy used in the present invention has a transformation temperature above which the alloy is deformed into a shape memorized in advance. In the two-way shape memory alloy, the alloy can be freely deformed for the memory purpose at a temperature lower than the transformation temperature. The shape thus memorized is exhibited at a temperature higher than the transformation temperature. It should be noted that the alloy continues to keep its shape even after the temperature is lowered below the transformation

temperature. On the other hand, the two-way shape memory alloy used in the present invention also permits memorizing the shape at a temperature lower than the transformation temperature, with the result that two different shapes can be reversibly exhibited with a boundary set by the transformation temperature. The term "substantially cylindrical shaped body" used in the present specification should be interpreted to include, for example, a cylindrical body having a spiral cross section and a coil-shaped cylindrical body as well as the ordinary cylindrical body.

Brief Description of the Drawings

Figs. 1(a) and 1(b) are side views each showing a stent for a tubular organ according to one embodiment of the present invention;

Figs. 2(a), 2(b), 3(a), 3(b), 4(a) and 4(b) are oblique views showing stents according to other embodiments of the present invention, (a) and (b) showing shrunk and expanded states, respectively;

Fig. 5 is a side view showing a catheter used for operating a stent of the present invention;

Fig. 6 is a cross sectional view showing in a magnified fashion the hub portion of the catheter shown in Fig. 5;

Fig. 7 is a side view showing how the stent shown in Fig. 1 is mounted to the catheter shown in Fig. 5; and

Figs. 8 and 9 are cross sectional views showing how the catheter shown in Fig. 7 is operated for leaving a stent mounted within a tubular organ.

Best mode for carrying out the invention

Figs. 1(a) and 1(b) collectively show a stent 10 for a tubular organ according to one embodiment of the present invention. The stent 10, which is formed by spirally winding a flat wire of a bidirectional shape memory alloy such as Ni-Ti binary alloy, Cu-Al-Ni ternary alloy or Cu-Zn-Al ternary alloy, keeps a shape expanded in the radial direction as shown in Fig. 1(b) at temperatures about the body temperature, i.e., at about 35 to 37°C, and keeps a shape shrunk in the radial direction as shown in Fig. 1(a) at temperatures substantially lower than the body temperature, i.e., at about 15 to 20°C. Where the flat wire is 0.04 mm in thickness and 1 mm in width and consists of a Ni-Ti binary alloy two-way shape memory alloy containing essentially about 51 atomic % of Ni and the balance substantially Ti, the stent 10, which is about 2 mm in inner diameter at the body temperature, can be shrunk to have an inner diameter of about 1.4 mm at 15°C or lower. The inner diam-

eter, length, etc. of the stent 10 can be determined appropriately to conform with the inner size of the tubular organ within which the stent 10 is mounted. In short, the stent under an expanded state should have an outer diameter substantially conforming with the inner diameter of a tubular organ such as a blood vessel, and the stent under a shrunk state should have an outer diameter small enough to permit the stent to be introduced into the desired position within the tubular organ.

The shape of the stent 10 is not restricted to a spiral shape shown in Fig. 1, as far as the stent is substantially cylindrical. For example, the stent may have a spiral cross section as shown in Fig. 2-(a) under a shrunk state and is cylindrical as shown in Fig. 2(b) under an expanded state. Also, a net of a two-way shape memory alloy wire may be formed into a cylindrical body as shown in Fig. 3. In this case, the mesh of the net is expanded from the shrunk state shown in Fig. 3(a) into the expanded state shown in Fig. 3(b) when the stent 10 is expanded in the radial direction. Further, the stent 10 may consist of a pipe as shown in Fig. 4. Naturally, the pipe under a shrunk state shown in Fig. 4(a) is expanded as shown in Fig. 4(b) depending on the temperature.

A catheter 12 shown in Fig. 5 is used for introducing the stent 10 into a desired position within a tubular organ of a living body. The catheter 12 comprises a catheter tube 14 open at both ends and a hub portion 16 mounted at the proximal end of the catheter tube 14 in a manner to communicate with the inner space of the catheter tube. The catheter tube 14 is formed of, for example, ethylene-vinyl acetate copolymer. On the other hand, the hub portion 16 is formed of, for example, polycarbonate. A number of side holes 18 are formed through the wall near the distal end of the catheter tube 14 such that a cooling liquid introduced into the catheter tube 14 is discharged radially through these side holes. The hub portion 16 comprises a linear cylindrical portion 16a through which a guide wire is introduced into the catheter tube 14, and a branched portion 16b branched at the central portion of the linear cylindrical portion 16a, as shown in Fig. 6. A hemostatic valve 20 formed of a soft material such as a silicone rubber is mounted at the proximal end of the linear cylindrical portion 16a so as to prevent the leakage of, for example, blood. A cooling liquid or the like is introduced through a port 16c of the branched portion 16b.

In introducing the stent 10 into a desired portion within a tubular organ, the stent 10 is mounted first at the distal end portion of the catheter tube 14 in a manner to cover the side holes 18. Then, a cooling liquid, e.g., an ice-cooled physiologic saline, is introduced through the port 16c and dis-

charged through the side holes 18 so as to cool the stent 10 to 15 to 20 °C. As a result, the stent 10 is shrunk so as to be brought into direct contact with the wall of the catheter tube 14 at the portion of the side holes 18, as shown in Fig. 7.

In the next step, the catheter tube 14 is introduced into a desired position within a tubular organ 22 through a guide catheter 24 introduced in advance into the tubular organ 22, as shown in Fig. 8. In this step, the ice-cooled physiologic saline is kept flowing out of the side holes 18. Also, a guide wire 26 is used for the introduction of the catheter tube 14 into the tubular organ 22. When the stent 10 mounted at the distal end portion of the catheter tube 14 has arrived at the desired position within the tubular organ 22, supply of the ice-cooled physiologic saline is stopped. As a result, the stent 10 is gradually warmed by the heat of the living body. When warmed to a temperature near the body temperature, the stent 10 is expanded to be directly contacted with the inner wall of the tubular organ 22, as shown in Fig. 9. Under this condition, the distal end portion of the catheter tube 14 can be easily withdrawn, with the expanded stent 10 left at the desired position within the tubular organ 22.

Where the stent 10 is recovered from within the tubular organ 22, the distal end portion of the catheter tube 14 is inserted into the stent 10, and an ice-cooled physiologic saline introduced through the port 16c is discharged through the side holes 18 formed at the distal end portion of the catheter tube 14. As a result, the stent 10 is cooled and shrunk to be directly contacted with the distal end portion of the catheter tube 14 as shown in Fig. 7. Naturally, the stent 10 can be recovered by pulling out the catheter tube 14. Similarly, the mounting position of the stent 10 within the tubular organ can be easily changed in the present invention.

It is possible to determine appropriately the number of side holes 18 formed at the distal end portion of the catheter tube 14 as well as the hole-forming region in view of the size of the stent, etc.

As described above in detail, the stent of the present invention is in the form of a cylindrical body of a two-way shape memory alloy which is expanded or shrunk depending on changes in temperature of the alloy on the basis of the normal body temperature. The particular construction of the invention produces prominent effects. For example, it is possible to recover the stent once expanded within a tubular organ. It is also possible to change the mounting position of the stent once mounted within a tubular organ. Further, the catheter of the present invention for operating the stent comprises side holes formed at the distal end portion. Naturally, the expanded stent mounted at the distal end portion of the catheter can be cooled

by a cooling liquid discharged through the side holes so as to shrink the stent. It follows that the catheter makes it possible to introduce and recover the stent without difficulty.

Industrial Application

The instrument of the present invention for ensuring the inner diameter and the catheter equipped with the instrument are inserted into a tubular organ such as a blood vessel of the human being or animals so as to keep the tubular organ expanded to have a desired inner diameter for at least a predetermined period.

Claims

1. (1) An instrument for maintaining a tubular organ at a predetermined inner diameter, characterized in that said instrument consists of a substantially cylindrical shaped body formed of a two-way shape memory alloy capable of expansion or shrinkage in the radial direction in accordance with changes in temperature.
2. (2) The instrument according to claim 1, wherein said cylindrical body expands in the radial direction at and around normal body temperature and shrinks in the radial direction at temperatures substantially lower than the body temperature.
3. (3) The instrument according to claim 1, wherein said cylindrical body is in the form of a hollow coil.
4. (4) The instrument according to claim 1, wherein said cylindrical body has a spiral cylindrical shape.
5. (5) The instrument according to claim 1, wherein said cylindrical body is in the form of a pipe.
6. (6) The instrument according to claim 1, wherein said cylindrical body has a mesh structure.
7. (7) The instrument according to claim 1, wherein said two-way shape memory alloy is selected from the group consisting of alloys of Ni-Ti binary alloy, Cu-Al-Ni ternary alloy and Cu-Zn-Al ternary alloy.
8. (8) A catheter equipped with an instrument for maintaining a tubular organ at a predetermined

inner diameter, characterized by comprising a catheter tube open at the proximal end or at both the proximal and distal ends, at least one side hole which communicates with said opening at the proximal end of the catheter tube and formed in the circumferential surface near the distal end of said catheter tube; a hub portion communicating with the distal end of the catheter tube; and an instrument for maintaining a tubular organ at a desired inner diameter, said instrument consisting of a cylindrical body formed of a two-way shape memory alloy capable of expansion or shrinkage in the radial direction, in accordance with changes in temperature, and covering at least a part of the distal end portion of the catheter tube, including the side hole.

9. (9) The catheter according to claim 8, wherein said hub portion consists of a branched hub having two ports, and a hemostatic valve located inside one of said two ports.

5

10

15

20

25

30

35

40

45

50

55



FIG. 1(a)



FIG. 1(b)




FIG. 2(a)




FIG. 2(b)




FIG. 3(a)




FIG. 3(b)



FIG. 4(a)




FIG. 4(b)

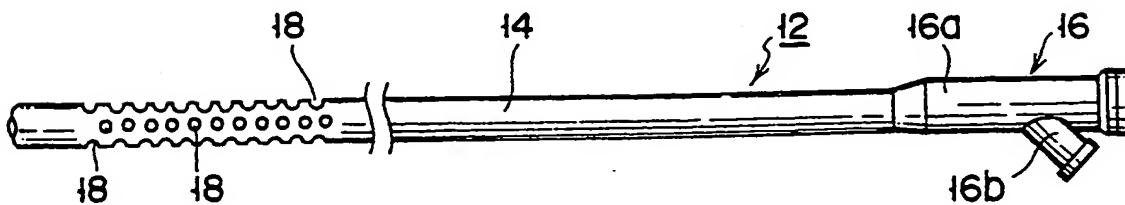


FIG. 5

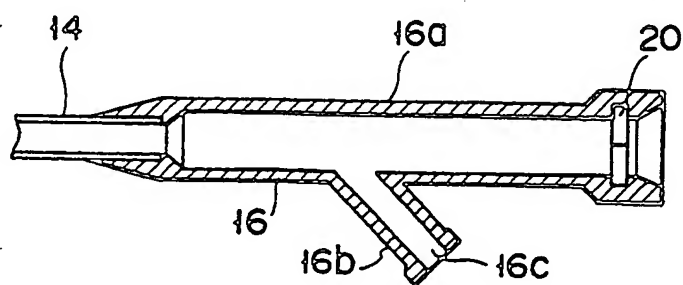


FIG. 6

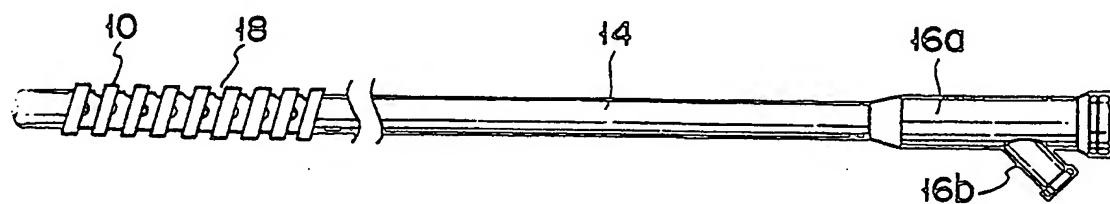


FIG. 7

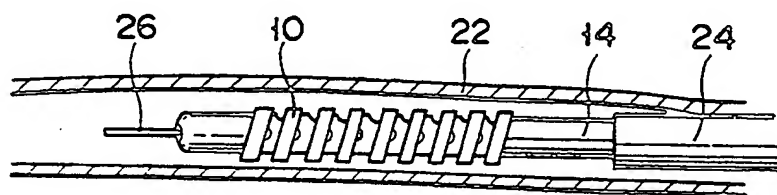


FIG. 8

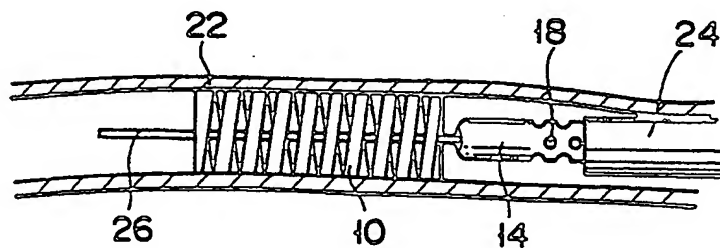


FIG. 9

100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000